

# Blackhawk Omni Ceiling Antenna

698-960/1710-2700 MHz 2.5/3.5 dBi (ANT-BH-OM-C)

The Blackhawk Omni Ceiling Antenna provides a 2.5 dBi gain for 698-960 MHz and a 3.5 dBi gain for 1710-2700 MHz

The Blackhawk Omni Ceiling Indoor Dome is designed to operate with all mobile carriers in mind, regardless of what frequency they operate on.

This antenna is suitable as an indoor antenna that can be mounted on the ceiling for repeater applications.


## Features:

- ◆ Suitable for all mobile carriers
- ◆ Offers a 360° beamwidth for complete coverage
- ◆ SMA-Male connector
- ◆ Made of aluminium and ABS




## BLACKHAWK OMNI CEILING ANTENNA

ELECTRICAL SPECIFICATIONS	MECHANICAL SPECIFICATIONS
Freq Range 698-960/1710-2700 MHz	Dimensions 186 X 86 mm
Impedance 50 Ω	Weight 0.25 kg
VSWR $\leq 1.8 / \leq 1.5$	Operating Temperature -40°C - +65°C
Gain 2.5 / 3.5 dBi	Connector 1 X N-Female
Max Input Power 50W	Material Aluminium and ABS
Polarisation Vertical	Antenna Colour White
Beamwidth Hz 360° Vert 90°/55°	
Lightning Protection DC Ground	

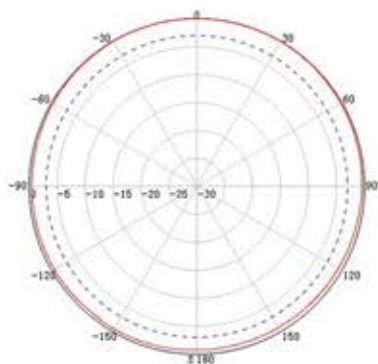

H-Plane

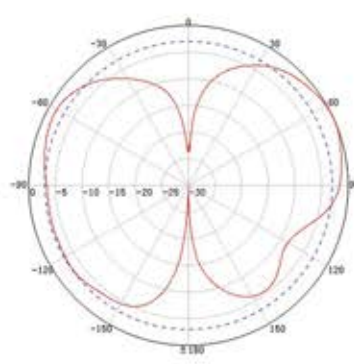

V-Plane